Features

The following product specifications apply to fuses of the BTB series. The BTB series consists of thermal cutoff fuses for over-temperature protection. The BTB series thermal fuses are widely used in various applications such as transformers, adapters, secondary batteries, household appliances, gas water heaters, lighting and other heating equipment.

Application

The BTB thermal cutoff fuses are non-resetting single-pole and normally closed devices and provide accurate, reliable protection for high temperature applications against overheating through interrupting electric current. With their metal body and strong leads these fuses offer a sturdy built and high rated currents such as 2 Ampere


















Dimensions (unit in mm)

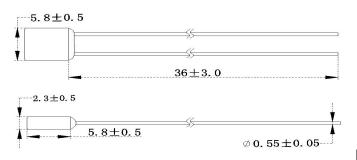

Part numbering system

4.1 Part Number Example: BTB2021150

	<u>B1</u>	<u>B</u>	2	<u>02</u>	<u>115</u>	<u>0</u>
	ļ	Ţ	ļ	Ţ	↓	ļ
	(1)	(2)	(3)	(4)	(5)	(6)
(1)	Model			BT	Better's	Brand
(2)	Product Type	B Thermal			l Fuse	
(3)	Product Color			2	White s	hell
(4)	Current Rating			02	2A	
(5)	Functional Temp	perature		115	Tf: 115°	C
(6)	Complement Cod	de		0	Normal	

BT	В	2	02	115	0
Better	A: 1A series	1: black shell		TF temperature	Serial number
	B: 2A series	2: white shell			













Electrial Characteristics at 25℃													
NO.	Part	I It I Tom	Operating Temperatur	Th	Th Tm	Rated Current	Voltage	Approvals					
NO.	number	(℃)	e (℃)	(℃)	(℃)	(A)	(V)	UL/C-UL	TUV	ССС	PSE	кс	VDE
1	BTB 102℃	102	98±2	80	203	2A	250V~	•	•	•	•	•	0
2	BTB 115℃	115	111±2	100	203	2A	250V~	•	•	•	•	•	•
3	BTB 125℃	125	120±2	106	203	2A	250V~	•	•	•	•	•	•
4	BTB 130℃	130	125±2	108	203	2A	250V~	•	•	•	•	•	•
5	BTB 135℃	135	131±2	116	203	2A	250V~	•	•	•	•	•	0
6	BTB 145℃	145	140±2	127	203	2A	250V~	•	•	•	•	•	0
7	BTB 150℃	150	144±2	129	203	2A	250V~	•	•	•	•	•	0

Note: 1. o means pending

2.In ULcertification,the Voltage also including AC 125V and DC 60V (DC 60V is limited to 115C and 125C)

3. • means approved

Ordering Information

Series	Function temperature (Tf)	Supplementary Code	Qty
ВТВ			







BTA SERIES THERMAL FUSE